


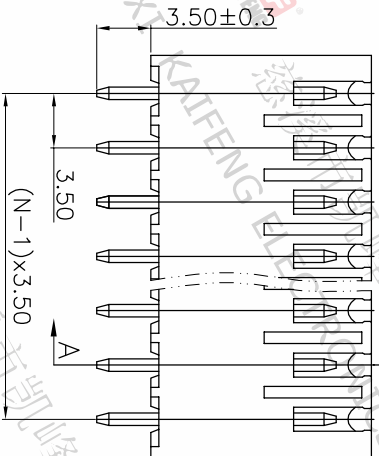
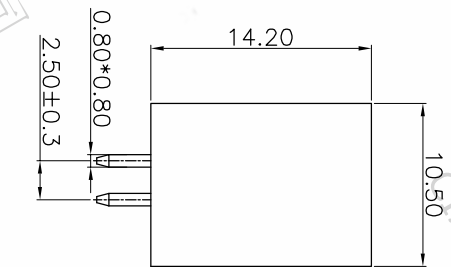
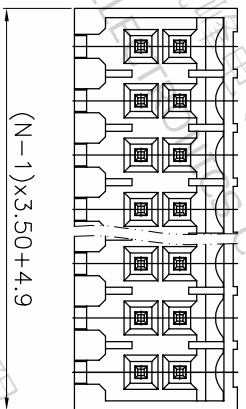


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.20	ZHANG	JIN

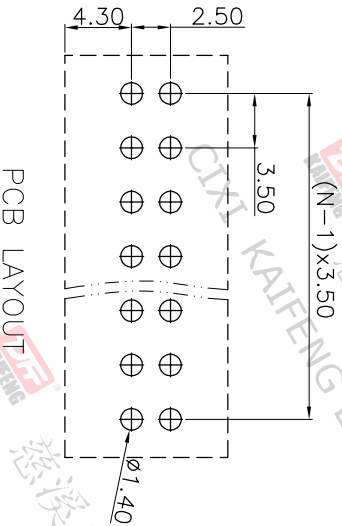

- Material
 @Housing : PA66, UL94V-0
 @Pin header : Copper alloy, Tin plated
- Electrical
 UL IEC
 Rated voltage : 300V 320V
 Rated current : 10A 13.4A
 Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC1600V/1min
- Mechanical
 Operating temperature: -40°C ~ +105°C
 Soldering temperature: 250°C ± 5/5sec
- RoHS compliance

HOW TO ORDER
 KF12EDCV-3.5-2*XXP-1 X-XXXX

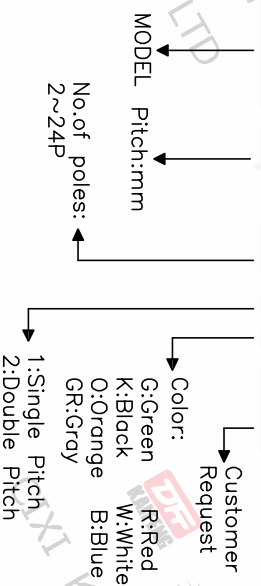

PCB LAYOUT

Pitch range	Nominal dimension range	Projection
>0 ~ >6	>0 ~ >30	0.1/10
>6 ~ >10	>30 ~ >60	0.1/10
~ 6 ~ 10	~ 60 ~ 100	0.1/10
~ 10 ~ 24	~ 100 ~ 150	0.1/10
±0.15 ±0.20 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30	±2*	0.1/10

DRAWING TYPE	SCALE	SHEET	OF
CUSTOMER DRAWING	1:1	1	1
DRAWING NO.	W10000992		

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD

TITLE: KF12EDCV-3.5-2*XXP-1X
 UNIT: mm
 SHEET SIZE: A4
 SERIES: KF12EDCV