


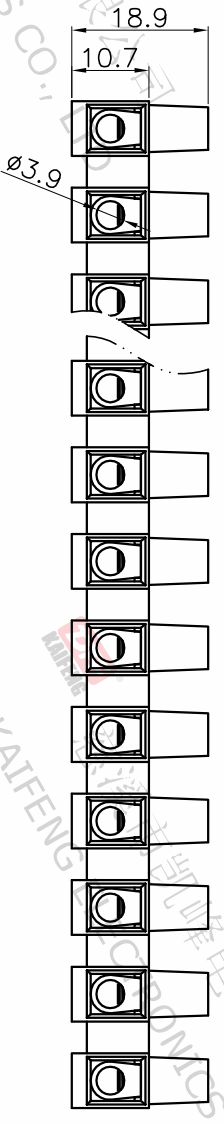


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.28	DENG	JIN

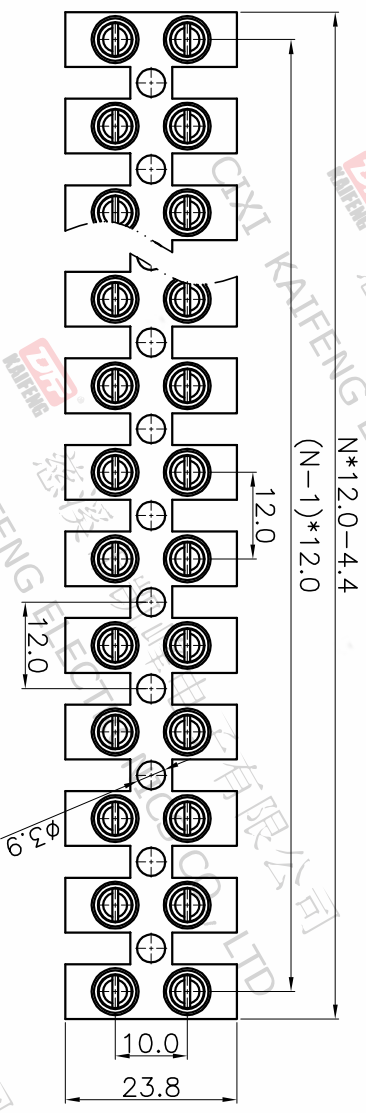

- Material
 - ①Screws : M3.5 steel, Zinc plated
 - ②Clamp : Brass, Ni plated
 - ③Reed : Stainless steel
 - ④Housing : PA66, UL94V-2
- Electrical
 - UL IEC
 - Rated voltage : 600V 500V
 - Rated current : 30A 41A
 - Wire range: 16-10AWG 1.5~6.0mm²
 - Withstanding Voltage : AC2200V/1min
- Mechanical
 - Operating temperature: -40°C~+110°C
 - Soldering temperature: 250°C±5/5sec
 - Torque: 0.8N.m (7.02Lb.in)
 - Strip length: 6-7mm
- RoHS compliance

HOW TO ORDER

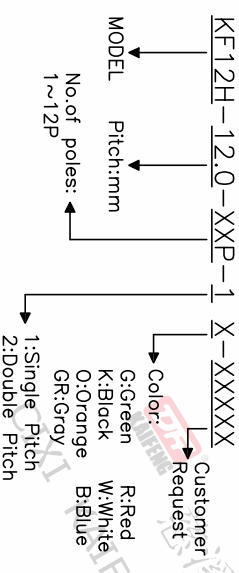

Pitch range	Nominal dimension range	PROJECTION	UNIT
>0	>0	□	mm
~6	>30	□	mm
~10	>60	□	mm
~24	>100	□	mm
~30	>150	□	mm
~60	>100	□	mm
~100	>150	□	mm
~150	>150	□	mm
±0.15	±0.30	□	±2°
±0.20	±0.30	□	±2°
±0.30	±0.50	□	±2°
±0.70	±1.00	□	±2°
±1.30	±1.30	□	±2°

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD

DRAWING TYPE: CUSTOMER DRAWING
SCALE: 1:1 SHEET: 1 OF 1
DRAWING NO.: W18000092

TITLE: KEF12HWP-12.0-XXP-1X
SHEET SIZE: A4
SERIES: KEF12H