
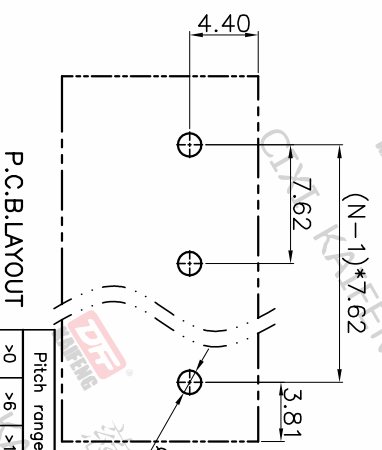
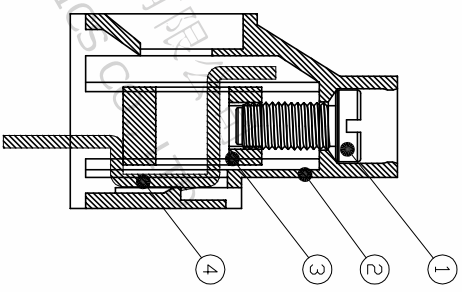
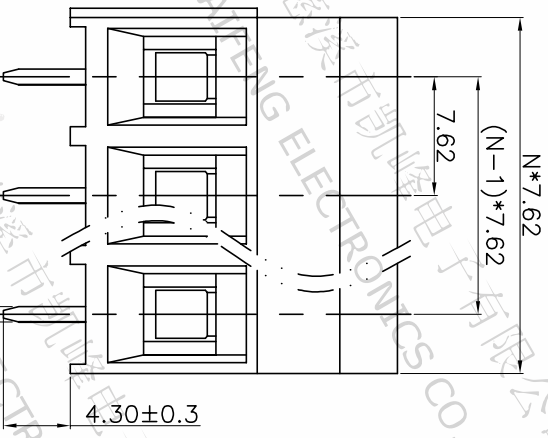
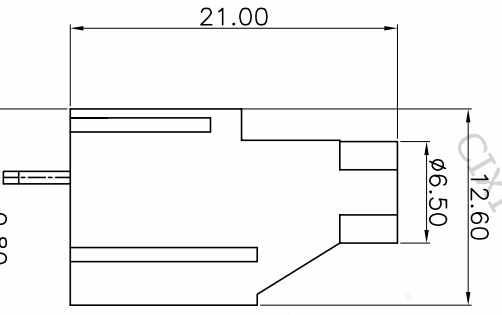


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.23	DENG	JIN

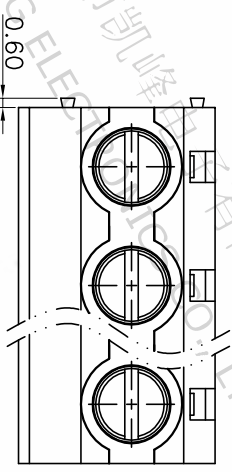

- Material
 ØScrews : M3.0 steel, Zinc plated,
 - slot type
- ØHousing : PA66, UL94V-0
- ØClamp : Copper alloy, Ni plated
- ØPin header : Copper alloy, Tin plated


- Electrical
 UL IEC
 Rated voltage : 300V 750V
 Rated current : 30A 41A
 Contact Resistance: 20mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC3000V/1min
 Wire range: 26-10AWG 6.0mm²

- Mechanical
 Operating temperature: -40°C ~ +105°C
 Soldering temperature: 250°C ±5/5sec
 Torque: 0.5N.m (4.43Lb.in)
 Strip length: 6-7mm

• RoHS compliance

HOW TO ORDER

KF950A1-9.5-XXP-1 X-XXXXX

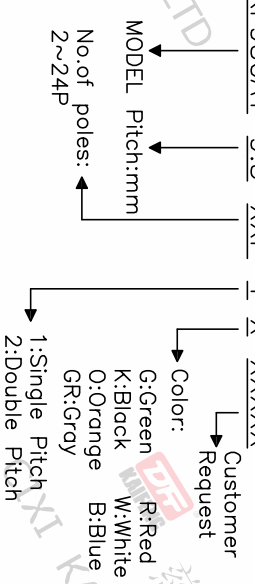

Pitch range	Nominal dimension range	Projection	UNIT
>0	>0	0.1/10	mm
~6	~30		
~10	~60		
~24	~100		
~30	~150		
±0.15	±0.30	±2°	
±0.20	±0.50		
±0.30	±0.70		
±1.00	±1.30		

DRAWING TYPE	CUSTOMER DRAWING	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	W15000842		

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD

TITLE: KF950A1-7.62-XXP-1X
 SERIES: KF950A1

